



## ALOVE30RRC

### BURLESQUE BY JENNAIR 30" COLUMN REFRIGERATOR (RIGHT SWING)

Intoxicate your senses with an intentionally unexpected, provocative column. Each limited edition pair boasts the seductive Burlesque interior and glass snakeskin air tower and is individually numbered. Flaunt your food with the same decadence as your finest jewels.

## FEATURES

### LIMITED AVAILABILITY

Only 13 pairs of Burlesque columns exist, each etched with a unique identifier. Each pair is an unapologetic expression of the pinnacle of luxury.

### BURLESQUE INTERIOR

Inspired by the velvet interiors of antique jewelry boxes and deep reds often seen in luxury cars, this first-of-its-kind burgundy finish is avante garde temptation incarnate. A striking contrast to the cool interior, this finish is an unexpected backdrop for fresh greens and other vibrant ingredients.

### SNAKESKIN AIR TOWER

An exotic, custom glass air tower in matte ceramic ink layered over bold red metallic ink and finished with an exquisite snakeskin motif. As the centerpiece of the column, the air tower evenly distributes cool air throughout.

### TRINITY COOLING

Revel in the trinity of food preservation: three zones, three precision sensors, calibrated every second. Fortified by an exposed air tower, you can conquer humidity levels and customize the temperature of each zone to your deepest desires.

### REMOTE ACCESS<sup>1</sup>

Open door. Power outages. Filter changes. Connect to WiFi for real-time notifications and control your columns from anywhere. Tap and swipe on both iOS and Android devices.<sup>1</sup>

<sup>1</sup> Appliance must be set to remote enable. WiFi & App required. Features subject to change. For details and privacy, visit [jennair.com/connect](http://jennair.com/connect).



## COGNAC30L

### COGNAC 30" CUTS BY JENNAIR LEATHER PANEL

Indulge in touchable textures that bring the warmth and premium feel of leather into the vertical surfaces of the kitchen. Each of the four special edition designs is swathed in seductive Italian leather. Carbon, Cognac, Croc and Caviar rewrite the rule of what can be touched in your kitchen.

## FEATURES

### COGNAC LEATHER

A unique amber-colored leather finish with varying depths of color throughout. The rich hue pairs with diverse handles, from high gloss jewelry-inspired gold or silver to natural, rustic tones in wood or antler.

### CHOOSE A CUSTOM HANDLE

Choose a JennAir® RISE™ or NOIR™ Design Expression handle to match your appliances or mount a one-of-a-kind handle crafted by an artist.<sup>1</sup>

### PAIRS WITH JENNAIR®

### COLUMN REFRIGERATION

Cuts By JennAir® leather panels complement JennAir® column refrigeration, adding further depth and intrigue to each piece.

<sup>1</sup> Accessory handles sold separately.







# 36" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE

JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29¾"(W) x 83⅞"(H) x 23⅛"(Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Base Unit (Panel Ready)	Base Unit+Stainless Panel Kits			
	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column refrigerator JBRFR30IGX, JBRFL30IGX, ALOVE30RRC				
	LH: JKCPL301GL, RH: JKCPR301GL	LH: JKCPL301GM, RH: JKCPR301GM	LH: JKCPL301GS, RH: JKCPR301GS	LH: JKCPL301GP, RH: JKCPR301GP

## OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

### RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity - One handle per kit

### EURO-STYLE HANDLE KIT COLUMNS

- W11220300
- For use with Custom Overlay panels
- Quantity - One handle per kit





### NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity - One handle per kit

### PRO-STYLE® HANDLE KIT COLUMNS

- W11220299
- For use with Custom Overlay panels
- Quantity - One handle per kit

## JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

			
Handle-to-handle join kit (JAJ13HSS)	Handle-to-hinge join kit (JAJ11HSS)	Hinge-to-handle join kit (JAJ12HSS)	Burlesque Handle-to-handle join kit (JAJ14JSS)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

W11356519B




# 30" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE

JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29<sup>3</sup>/<sub>4</sub>" (W) x 83<sup>7</sup>/<sub>16</sub>" (H) x 23<sup>11</sup>/<sub>16</sub>" (Depth without door panels/handles)

### PRODUCT DIMENSIONS

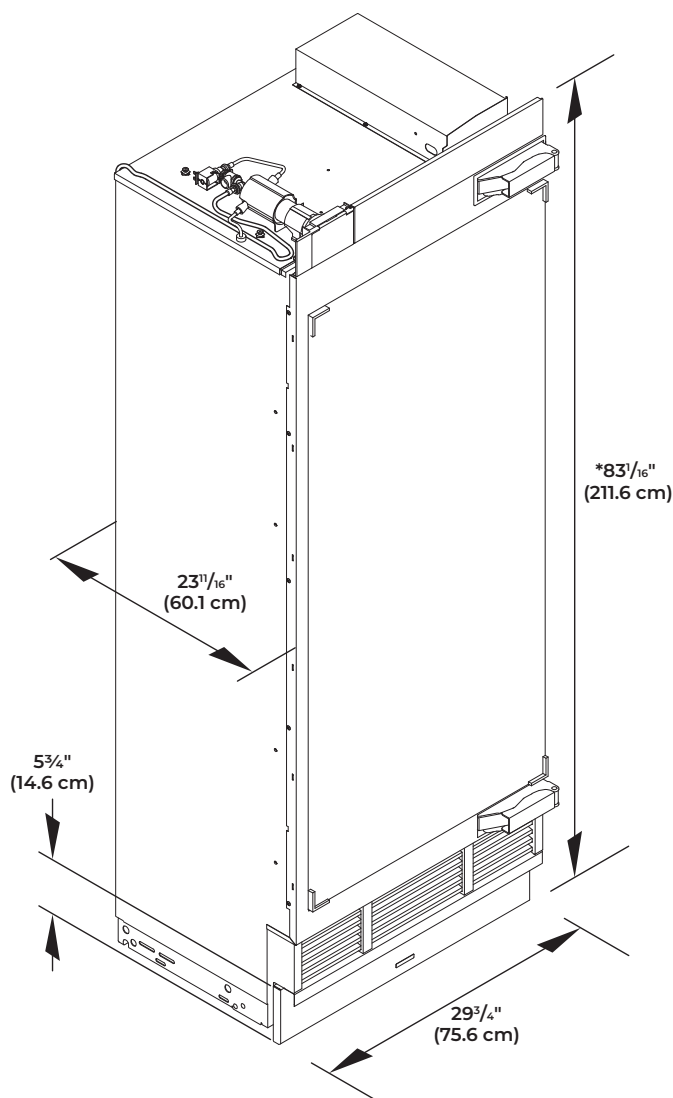

\*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




# 30" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE


JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29<sup>3</sup>/<sub>4</sub>"(W) x 83<sup>7</sup>/<sub>16</sub>"(H) x 23<sup>1</sup>/<sub>16</sub>"(Depth without door panels/handles)

### PRODUCT DIMENSIONS

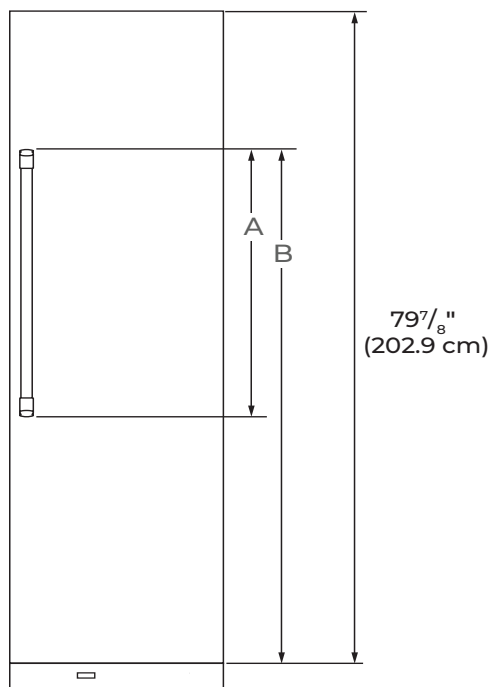

FRONT VIEW

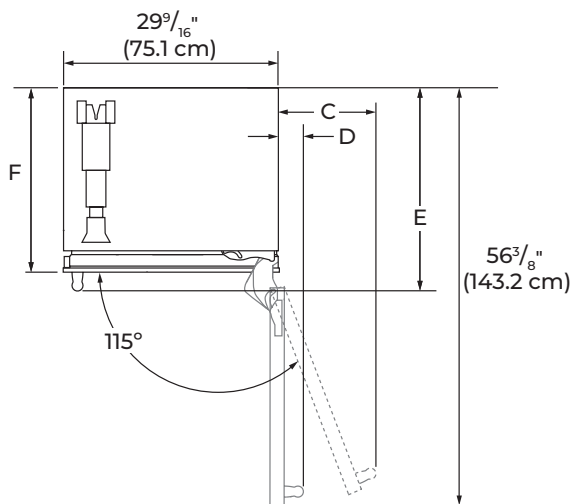

TOP VIEW

DIMENSION	DESCRIPTION	JBRFR30IGX, JBRFL30IGX, ALOVE30RRC
A	<b>Height of door handle</b>	
	RISE™ Stainless	57 <sup>1</sup> / <sub>16</sub> " (147.2 cm)
	NOIR™ Stainless	40 <sup>5</sup> / <sub>8</sub> " (103.2 cm)
	Euro-Style Stainless	50 <sup>1</sup> / <sub>16</sub> " (127.1 cm)
	Pro-Style® Stainless	45 <sup>9</sup> / <sub>16</sub> " (115.7 cm)
	Custom panel (3/4" thick)	** **
B	<b>Height to top of door handle</b>	
	RISE™ Stainless	70 <sup>3</sup> / <sub>4</sub> " (179.7 cm)
	NOIR™ Stainless	68 <sup>1</sup> / <sub>16</sub> " (174.5 cm)
	Euro-Style Stainless	68 <sup>5</sup> / <sub>16</sub> " (173.4 cm)
	Pro-Style® Stainless	66 <sup>1</sup> / <sub>16</sub> " (167.7 cm)
	Custom panel (3/4" thick)	** **
C	<b>Width from side of refrigerator to handle – door fully open 115°</b>	15 <sup>1</sup> / <sub>2</sub> " (39.4 cm)
D	<b>Width from side of refrigerator to handle – door open 90°</b>	5" (12.7 cm)
E	<b>Depth with handle</b>	
	RISE™ Stainless	26 <sup>5</sup> / <sub>8</sub> " (67.7 cm)
	NOIR™ Stainless	26 <sup>9</sup> / <sub>16</sub> " (67.5 cm)
	Euro-Style Stainless	26 <sup>9</sup> / <sub>16</sub> " (67.4 cm)
	Pro-Style® Stainless	27 <sup>1</sup> / <sub>8</sub> " (68.9 cm)
	Custom panel (3/4" thick)	** **
F	<b>Depth with door</b>	24 <sup>1</sup> / <sub>2</sub> " (62.2 cm)

\*\*For custom panel models, this depends on handle chosen.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




# 30" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE

JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L  
29<sup>3</sup>/<sub>4</sub>"(W) x 83<sup>7</sup>/<sub>16</sub>"(H) x 23<sup>1</sup>/<sub>16</sub>"(Depth without door panels/handles)

### OPENING DIMENSIONS

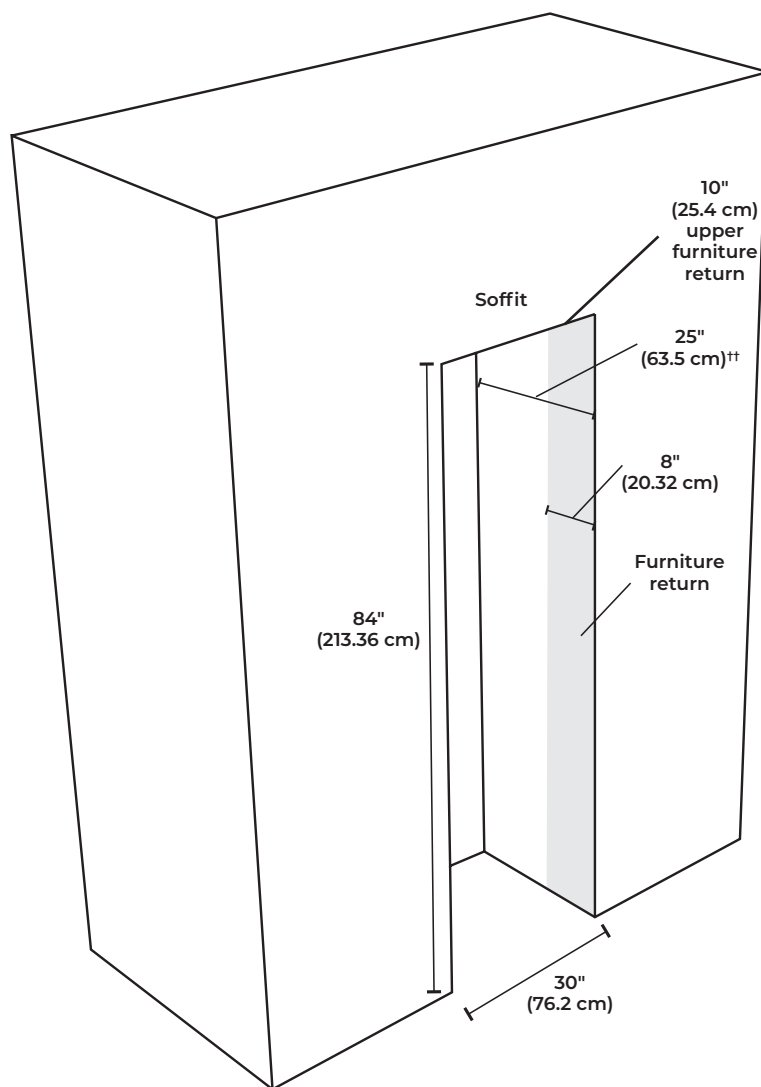

††24" with 24" trim kit.




# 30" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE


JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29<sup>3</sup>/<sub>4</sub>"(W) x 83<sup>7</sup>/<sub>16</sub>"(H) x 23<sup>1</sup>/<sub>16</sub>"(Depth without door panels/handles)



water supply location  
under unit  
(accessible behind air grille)

TOP VIEW

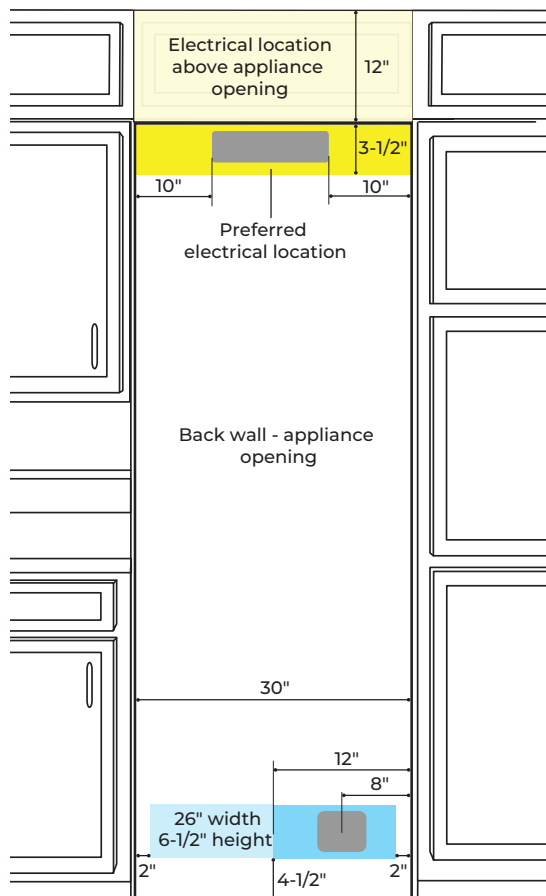

water supply location behind unit  
(also approved for electrical supply)

FRONT VIEW - CABINET OPENING

### ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3<sup>1</sup>/<sub>2</sub>" of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

### WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

### FLOOR WATER SUPPLY LOCATIONS

- Floor access is available through the open space behind the air grille.
- The area available is shown in blue and is limited in size by the compressor compartment on the right and leveling assembly on the left.
- The height of the open space above the access area is 11" high which makes drilling water lines access holes through floor after installation possible.



# 36" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE

JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29<sup>3</sup>/<sub>4</sub>"(W) x 83<sup>7</sup>/<sub>16</sub>"(H) x 23<sup>1</sup>/<sub>16</sub>"(Depth without door panels/handles)

### ELECTRICAL REQUIREMENTS

#### WARNING



##### Electrical Shock Hazard

**Plug into a grounded 3 prong outlet.**

**Do not remove ground prong.**

**Do not use an adapter.**

**Do not use an extension cord.**

**Failure to follow these instructions can result in death, fire, or electrical shock.**

115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

### WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 kPa and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

#### REVERSE OSMOSIS WATER SUPPLY

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

JennAir® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

### LOCATION REQUIREMENTS

#### WARNING



##### Explosion Hazard

**Keep flammable materials and vapors, such as gasoline, away from refrigerator.**

**Failure to do so can result in death, explosion, or fire.**

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.






# 30" COLUMN REFRIGERATOR

## DETAILED PLANNING DIMENSIONS GUIDE

JBRFR30IGX, JBRFL30IGX, ALOVE30RRC, CARBON30L,  
COGNAC30L, CROC30L and CAVIAR30L

29<sup>3</sup>/<sub>4</sub>" (W) x 83<sup>7</sup>/<sub>16</sub>" (H) x 23<sup>1</sup>/<sub>16</sub>" (Depth without door panels/handles)

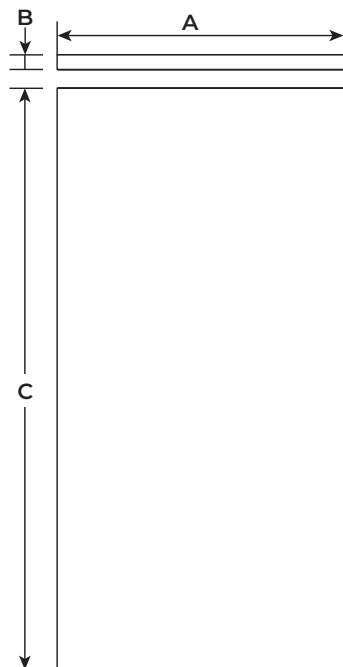

FRONT VIEW


### WOOD PANEL GUIDE

#### ⚠ CAUTION

##### Pinch Hazard

Installation of door panels with less than a <sup>3</sup>/<sub>8</sub>" (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

MODEL	FLUSH WIDTH (A)
30"	29 <sup>3</sup> / <sub>4</sub> " (75.6 cm)

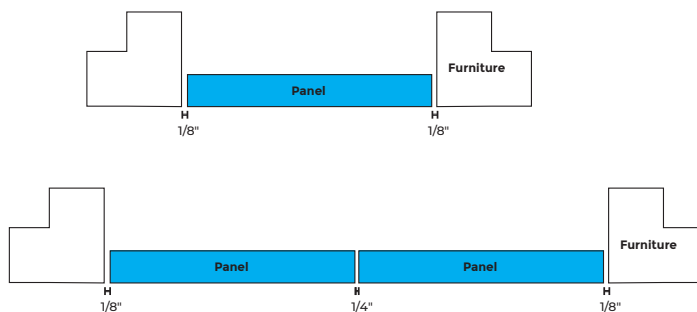

Thickness (B)	3/4" (1.9 cm) max.
Weight	60 lbs. (27.2 kg) max.
Height (C)	79 <sup>7</sup> / <sub>8</sub> " (202.9 cm)