


## 36" PRO-STYLE® DUAL-FUEL RANGES


JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

## PRODUCT DIMENSIONS

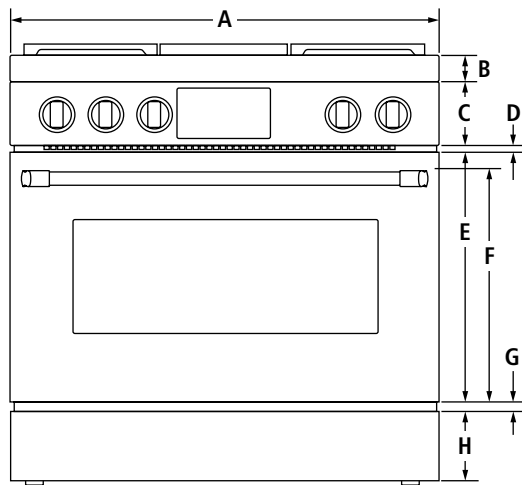

FRONT VIEW

MODEL #		JDRP536WP	JDRP436WP
		in	cm
<b>A</b>	Overall width	35 <sup>7</sup> / <sub>8</sub>	91.1
<b>B</b>	Height of bullnose	2 <sup>1</sup> / <sub>4</sub>	5.5
<b>C</b>	Height of control panel	5 <sup>3</sup> / <sub>8</sub>	13.5
<b>D</b>	Space between door and control panel	<sup>7</sup> / <sub>8</sub>	2.0
<b>E</b>	Height of door	20 <sup>3</sup> / <sub>4</sub>	52.5
<b>F</b>	Height to top of handle	19 <sup>3</sup> / <sub>8</sub>	49.0
<b>G</b>	Space between door and lower panel	1	2.5
<b>H</b>	Height of lower panel	5 <sup>1</sup> / <sub>2</sub>	14.0
<b>I</b>	Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5
<b>J</b>	Depth with handle	29 <sup>1</sup> / <sub>4</sub>	74.2
<b>K</b>	Depth with door fully open	45 <sup>3</sup> / <sub>4</sub>	116.2

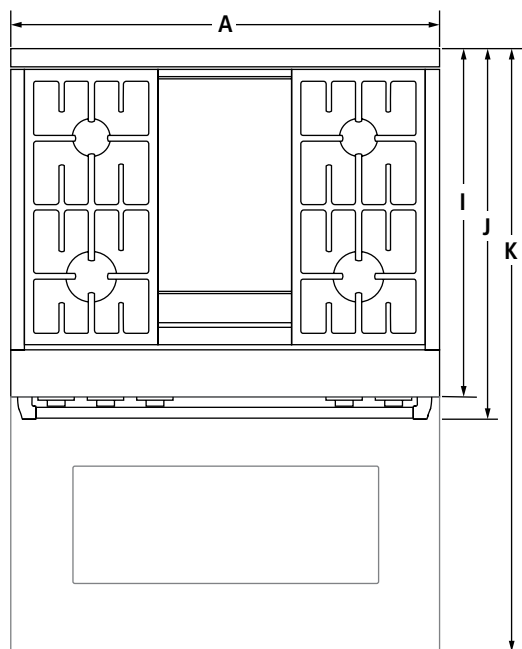

TOP VIEW


**IMPORTANT:** Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## 36" PRO-STYLE® DUAL-FUEL RANGES

JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

## DIMENSIONS AS INSTALLED

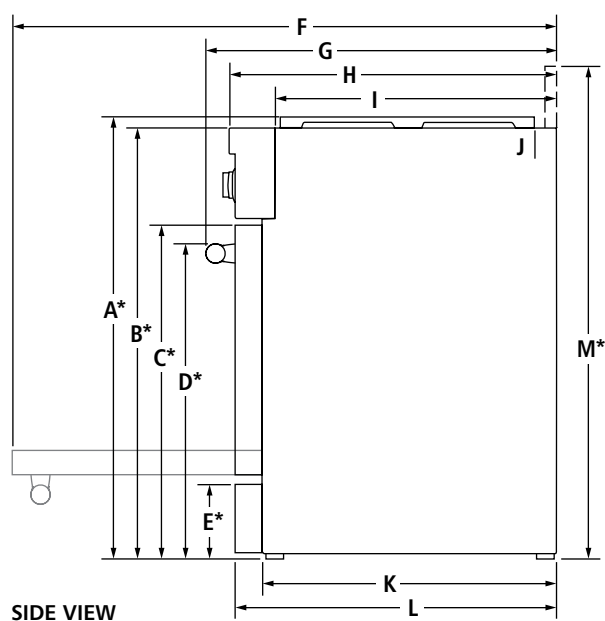

MODEL #		JDRP536WP JDRP436WP	
		in	cm
A*	Height to top of grates (min.)	36 <sup>3</sup> / <sub>4</sub>	93.3
B*	Height to top of cooking surface (min.)	35 <sup>3</sup> / <sub>4</sub>	90.8
C*	Height to top of door (min.)	27 <sup>3</sup> / <sub>8</sub>	69.5
D*	Height to top of handle (min.)	25 <sup>7</sup> / <sub>8</sub>	65.7
E*	Height to top of lower panel (min.)	5 <sup>7</sup> / <sub>8</sub>	14.9
F	Depth with door fully open	45 <sup>3</sup> / <sub>4</sub>	116.2
G	Depth with handle	29 <sup>1</sup> / <sub>4</sub>	74.2
H	Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5
I	Depth without control panel	23 <sup>1</sup> / <sub>2</sub>	59.5
J	Depth between grates and wall	1 <sup>3</sup> / <sub>4</sub>	4.5
K	Depth without door	24 <sup>5</sup> / <sub>8</sub>	62.5
L	Depth with door	26 <sup>3</sup> / <sub>4</sub>	68.0

## OPTIONAL ACCESSORIES

M*	Height to top of 9" stainless steel backsplash (min.)	44 <sup>3</sup> / <sub>4</sub>	113.7
----	---	--------------------------------	-------

\*Add 1<sup>3</sup>/<sub>4</sub>" (4.4 cm) to the height dimension when leveling legs are fully extended.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only.


**Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


## 36" PRO-STYLE® DUAL-FUEL RANGES

JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"


## OPENING/CLEARANCE DIMENSIONS

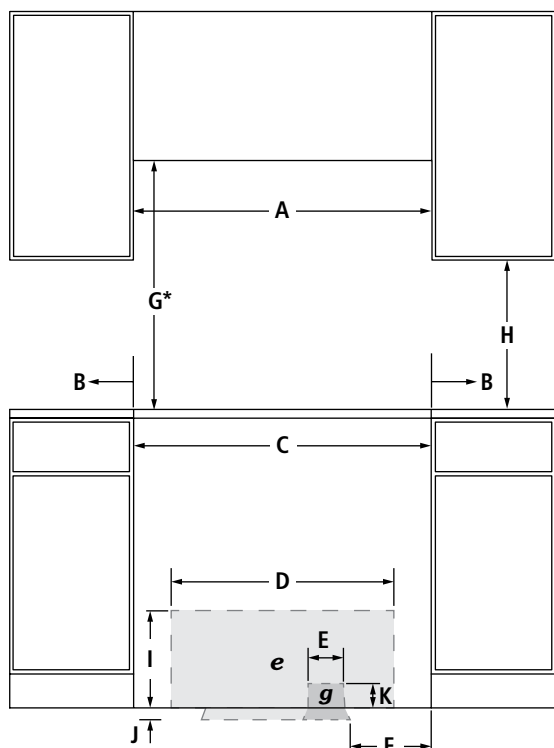

FRONT VIEW

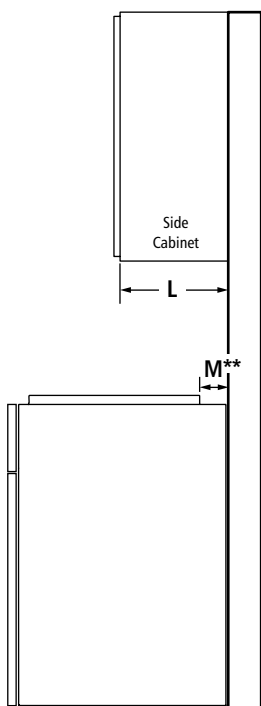

SIDE VIEW

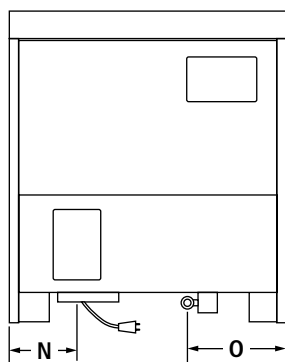

BACK VIEW

MODEL #		JDRP536WP JDRP436WP	
		in	cm
<b>A</b>	Width of combustable area above cooking surface (min.)	36	91.4
<b>B</b>	Width from range to fixed wall or other combustable material (min.)	6	15.2
<b>C</b>	Width of opening (min.)	36 <sup>1</sup> / <sub>4</sub>	92.1
<b>D</b>	Width of electrical installation area	28	71.1
<b>E</b>	Width of gas installation area	14	35.5
<b>F</b>	Width from side cabinet to gas installation area	6	15.2
<b>G*</b>	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	42	106.7
<b>H</b>	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
<b>I</b>	Height of electrical installation area	15	38.1
<b>J</b>	Depth of electrical and gas installation area	5	12.7
<b>K</b>	Height of gas installation area	3	7.6
<b>L</b>	Depth of upper cabinet (max.)	13	33.0
<b>M**</b>	Depth to wall (min.)	6	15.2
<b>N</b>	Width to electrical conduit	9 <sup>1</sup> / <sub>8</sub>	23.0
<b>O</b>	Width to gas inlet	14 <sup>3</sup> / <sub>8</sub>	36.5
<b>e</b>	Recommended electrical access location		
<b>g</b>	Recommended gas supply line location		

\*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

\*\*If back wall is constructed of a combustable material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

**ELECTRICAL REQUIREMENTS**

240 volt, 60 Hz, AC only, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended. A UL listed 40-amp power supply cord kit.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only.

**Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.